

45TW-28

Continuous Motion Tray Shrink Wrapper

ARPAC®

A DURAVANT COMPANY

TRAY APPLICATIONS

- Cans
- Plastic bottles
- Jars
- Glass bottles
- Floor tiles
- Plates
- Cartons



FEATURES & BENEFITS

- Heavy-duty rugged construction designed for high durability and around-the-clock operation
- Laser cut and CNC machined components for maximum precision
- Powder coat finish that provides a durable scratch resistant surface and prevents corrosion
- Allen-Bradley® PanelView 600Plus operator interface with color touchscreen, message display and self-diagnostics
- Digital controls for fast and accurate setup when changing product size and film
- Bypass mode allows product to pass through the machine with out being wrapped and without heating the tunnel
- 6' infeed belt conveyor for product pacing
- Durable Intralox conveyor belts eliminate tracking problems
- Continuous motion telescoping infeed, seal conveyor and carriage for optimum speed and performance
- Manual film splicing bar for quick and easy film changeovers
- 14" diameter side mounted film cradles for easy film loading
- 70" single zone shrink tunnel
- 3-way cooling feature at the tunnel exit for immediate product handling
- NEMA 12 electrical cabinet and controls
- Central point lubrication simplifies preventive maintenance
- Low film alert warns that a film changeover will soon be necessary

SPECIFICATIONS

Speed

- Up to 45 trays per minute

Power Requirements

Electrical

- 460VAC, 3Ph, 60Hz, 48A, 38kW

Pneumatic

- 80 psi, 30 SCFM

Product Range*


- Width (across machine): 6" to 18"
- Length (down machine): 6" to 15"
- Height: 2" to 12"

* Specifications and product sizes may vary, depending upon the application.

Film

- Max. film width: 27" single-wound
- Clear or randomly printed
- Max. film roll diameter: 14" with a 3" core
- Max. film gauge: 4 mil.
- Film type: low density polyethylene (L.D.P.E.)

Right hand model shown, opposite hand available on request
 Note: Final layout may vary

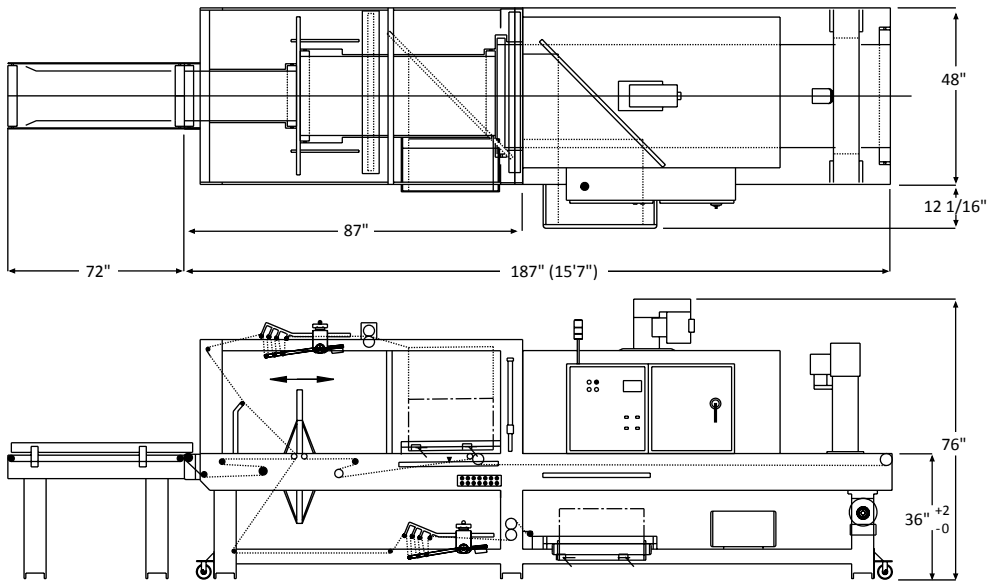


OPTIONS

- Casters for machine portability
- Quick-change seal frame cylinder kit for higher speeds
- Jib crane to assist with film loading
- Dual film cradle for quick film changeover
- 20" film roll diameter capacity
- Alternate voltages available: 208VAC, 220VAC, 575VAC
- Print registration - top film only
- Seal gap bridge, roller or telescoping, for product 3"-6" long



User-Friendly Operator Controls

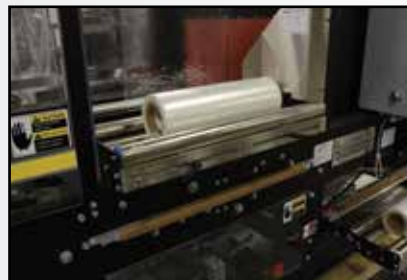

14" Diameter Side Mounted Film Cradles



Single Zone Tunnel with Product Cooling Feature

Complete Aftermarket Service & Support for Your Packaging Equipment

SUPPORTPRO™

A DURAVANT SERVICE

Call **844.777.8776** for your regional tech

24/7 Help Available



THE DURAVANT FAMILY OF COMPANIES

ARPAC | FISCHBEIN INTERNATIONAL | FMH CONVEYORS | HAMER-FISCHBEIN | KEY TECHNOLOGY | MARLEN INTERNATIONAL | MESPACK | OHLSON | QC INDUSTRIES

www.duravant.com